

## Benchtop DC Ionizer (TM0701JYY-001)

Input current: DC 24V

Ion balance:  $0 \pm 10V$

Decay time:  $< 5s$  ( 1000V ~ 100V 200mm )

Applications: Electronic, pharmaceutical, printing and static sensitive production

Product specifications: 130mm(L)\*60mm(W)\*170mm(H)



## Benchtop Ionizing Blower (TM0701JYY-002)

- Air speed capacity 45~190CFM adjustable range
- Ion Balance ( $\pm 10V$ )
- Specifications:  
570mm(L)\*175mm(W)\*205mm(H)  
460mm(L)\*190mm(W)\*225mm(H)



## Overhead Ionizing Blower (TM0701JYY-003)

- Ion Balance  $\pm 5V$
- Power input: AC 110V/220V, 50HZ/60HZ
- Decay time  $< 3s$ , ( 1000V ~ 100V 600mm )
- Weight: 3.5kg
- Specifications:  
430mm(L)\*170mm(W)\*60mm(H).



## Static AC Ionizing Air Gun (TM0701JYY-004)



Quickly decapitating static charges, effective working distance 150~600mm, low noise

Applications: Ideal for small electronic components

Dual currents selection 110V/60HZ、220V/50HZ


Weight: 3.5kg

Sizes: 110(W)\*170(L)\*90(H)mm

## Ionizing Air Snake(TM0701JYY-006)



## Ionizing Air Nozzle (TM0701JYY-007)

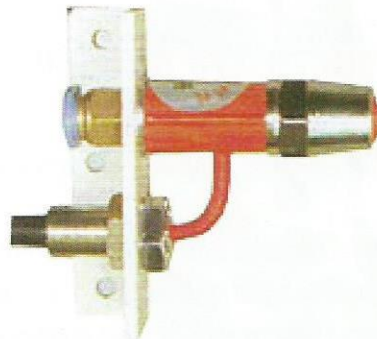

## Ionizing Air Bar (TM0701JYY-008)

