

STEALTH-WAND™ Kits

The Virtual Venturi Stealth-Wand™ vacuum generating handle with a wafer tip. The front connecting tip accepts all of our press fit wafer tips. Includes 6 feet of coiled (VCH-1/16-6) 1/16 inch vacuum hose, a (V3014-1/8NPT) 1/8 NPT to 1/16" barb adapter for the supply line, a wafer tip as specified below the vacuum generating handle, and a VBM-4 wafer wand holder. Operates off of 30 to 70 psi compressed air or nitrogen.

VVSW-MW4 The above kit with the VMWT-A which handles wafers up to 4"

VVSW-MW6 The above kit with the VMWT-B which handles wafers up to 6"

VVSW-MW8 The above kit with the VMWT-C which handles wafers up to 8"

VVSW-MW12 The above kit with the VMWT-D which handles wafers up to 12"

* Normally open vacuum

VVSW-X The Virtual Venturi Stealth-Wand™ vacuum generating handle, with 6 feet of 1/16 inch coiled vacuum hose, a 1/8 NPT to 1/16" barb adapter for the supply line. No wafer tip or holder.

STEALTH-WAND™ ELITE Kits

The Virtual Venturi Stealth-Wand™ Elite vacuum generating handle with a wafer tip. The front connecting tip accepts all of our press fit wafer tips. Includes 6 feet of coiled (VCH-1/16-6) 1/16 inch vacuum hose, a (V3014-1/8NPT) 1/8 NPT to 1/16" barb adapter for the supply line, a wafer tip as specified below and a VBM-4 wafer wand holder. Operates off of 30 to 50 psi compressed air or nitrogen.

VVSW-NC-MW4 The above kit with the VMWT-A which handles wafers up to 4"

VVSW-NC-MW6 The above kit with the VMWT-B which handles wafers up to 6"

VVSW-NC-MW8 The above kit with the VMWT-C which handles wafers up to 8"

VVSW-NC-MW12 The above kit with the VMWT-D which handles wafers up to 12"

* Normally closed vacuum

* Uses air only when button is pushed

VVSW-NC-X The Virtual Venturi Stealth-Wand™ ELITE vacuum generating handle, with 6 feet of coiled (VCH-1/16-6) 1/16 inch vacuum hose, a (V3014-1/8NPT) 1/8 NPT to 1/16" barb adapter for the supply line. No wafer tip or holder

VBM-5 Bench mount holder. For use with any Stealth Wand series vacuum wands


Threaded Replacement Fitting

V3014-1/8NPT Adapt to 1/16" ID hose, for compressed air applications




Our STEALTH-WANDS™ provide the highest level of pick-up-power. These compressed-air-powered wafer handling tools are whisper quiet and consume a minimal amount of compressed air or nitrogen.

STEALTH-WAND™

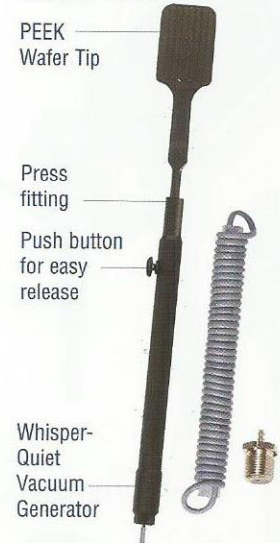

STEALTH-WAND™ ELITE

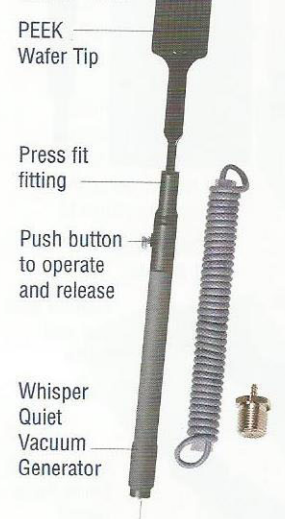

VBM-5

